



TECHNICAL SHEET: **SOFT**

COMPOSITION:

Mix of natural fibers regenerated (cotton frayed -wool mix) and synthetic fibers (acrylic and polypropylene).

FEATURES:

Felt, gray colour , thermobonded with thermoplastic characteristics of high power sound absorption, sound insulation and thermal insulation.

Environmentally and totally recyclable product

The product is in sheets or rolls.

The intrinsic characteristics make the product conformity to fire resistance tests according to norm Fiat 9.55655 ,Standard Test Fiat N. 7.G2000 and UL Standard 94 (exception of the self adhesive Soft).

DIMENSIONS AND TOLERANCES:

Plates

Length: 200 cm max toll. $\pm 5\%$

Width: 160 cm toll. $\pm 5\%$

Rolls

Width: 70 cm to 210 toll. $\pm 5\%$

THICKNESS:

from 8 to 40 mm toll $\pm 10\%$

WEIGHT:

g /sqm from 600 to 2200 toll. $\pm 5\%$

PACKING:

Plates: in bundles wrapped in polythene


Rolls: Wrapped in polythene

ESTHETIC FINISHES:

Nonwoven 17 to 120 g /sqm

ADHESIVE:

Hot Melt Adhesive coated strips of 1 cm width, with a pitch of 1 to 2 cm for the entire surface.

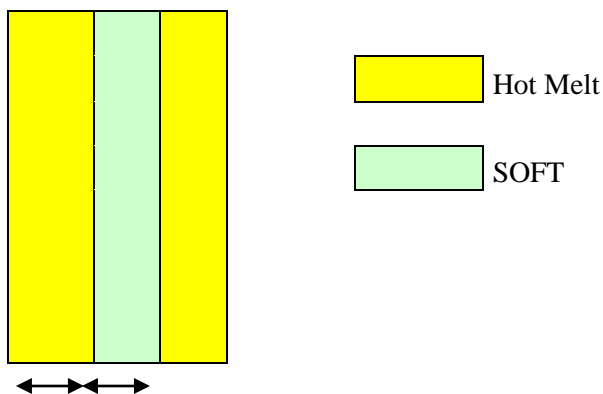

The surface of the product, adhesive according to the picture, is protected with a silicone liner of polyethylene.

The product can be adhesive on both surfaces.

Eventually, on a surface, can be attached a Nonwoven from 17 to 120 g/sqm).

FURTHER WORK

The product can be die cut according to customer's design, size max 110 x 120 cm.

NOTE

ATD = Hot Melt Adhesive

Double adhesive (2 ATD) means when space SOFT / adhesive is 1 cm / 1 cm